

HPD DISTRIBUTOR



High Power Distributor



Easy to install

- Housing made of flame-retardant material in accordance with UL94 V-1
- Extremely easy to connect
- No soldering required
- Open spring terminal
Insert wire
Close spring terminal

HPD DISTRIBUTOR

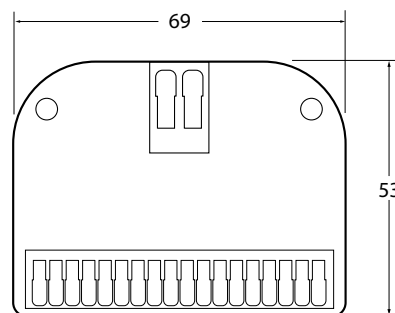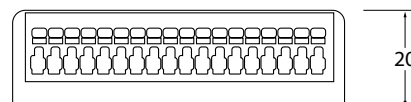


SPECIFICATIONS

- | | |
|-------------------------------|------------------------------------|
| ■ Input voltage: | DC5-48 V |
| ■ Material: | Copper and PC |
| ■ Housing colour: | White |
| ■ Maximum current per branch: | 10 A |
| ■ Maximum total current: | 25 A |
| ■ Input cable cross-section: | 22-12 AWG/0,35-4,0 mm ² |
| ■ Output cable cross-section: | 24-16 AWG/0,2-1,5 mm ² |

Connection
without soldering

Output
connections

Input
connection



HPD DISTRIBUTOR

High Power Distributer

LEDTEC

Product designation	Light colour	Description	Abbildungung
05400N0001 9-way distributor Mono (2p) – open wires	Single colour (2 connections)	1 input, 9 branches for single-colour LED modules	
05400N0002 6-way distributor CCT (3p) – open wires	CCT (3 connections)	1 input, 6 branches for CCT LED modules	
05400N0003 4-way distributor RGB (4p) – open wires	RGB (4 connections)	1 input, 4 branches for RGB LED modules	
05400N0004 3-way distributor RGBW (5p) – open wires	RGBW (5 connections)	1 input, 3 branches for RGBW LED modules	

